


Hassco

# Double Wall Fuel Oil Tank

1. 2" Threaded Fitting
2. 1 1/2" Threaded Fitting
3. 2 1/2" Threaded Fitting
4. Lift Lug
5. ULC Label
6. Legs
7. 1" Drain (NPT) Plugged
8. Emergency Vent (interstice)

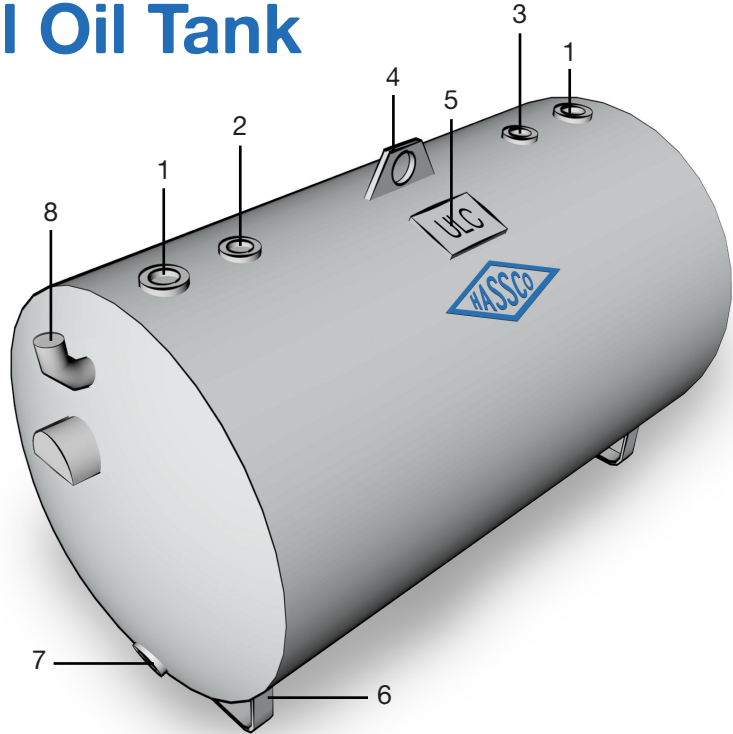

Material (gauge)	Capacity	Diameter	Length	Weight
12	450L/100G	30"	48"	420lbs.
12	1100L/250G	38"	60"	680lbs.
12	1360L/300G	38"	72"	740lbs.
12	2200L/500G	50"	72"	1060lbs.

## General Information

HASSCO's line of double wall tanks includes tanks which are specific for the storage of fuel oil & lubricating oils. This tank is available in double wall vacuum monitored and integral contained tank designs as well as horizontal and vertical configurations. These tanks come with a minimum of 4 NPT fittings, HASSCO can customize the fittings on these tanks to best suit your installation requirements. All HASSCO tanks are phosphate washed prior to applying a high build metal treatment and two top coats of enviro-smart water based paint.

## Options

- Single wall version available
- Tank gauges, alarms, heaters and pumping systems
- Powder Coating
- Interior linings
- Available in custom sizes and configurations

## Sizing

- Up to 2200L/500G

## Conformity

- ULC S602

