


Hassco

Fuel Oil & Lubricating Oil Tanks

Double-Wall

1. 2" Threaded Fitting
2. 1 1/2" Threaded Fitting
3. 2 1/2" Threaded Fitting
4. Lift Lug
5. ULC Label
6. Legs
7. 1" Drain (NPT) Plugged
8. Emergency Vent (interstice)

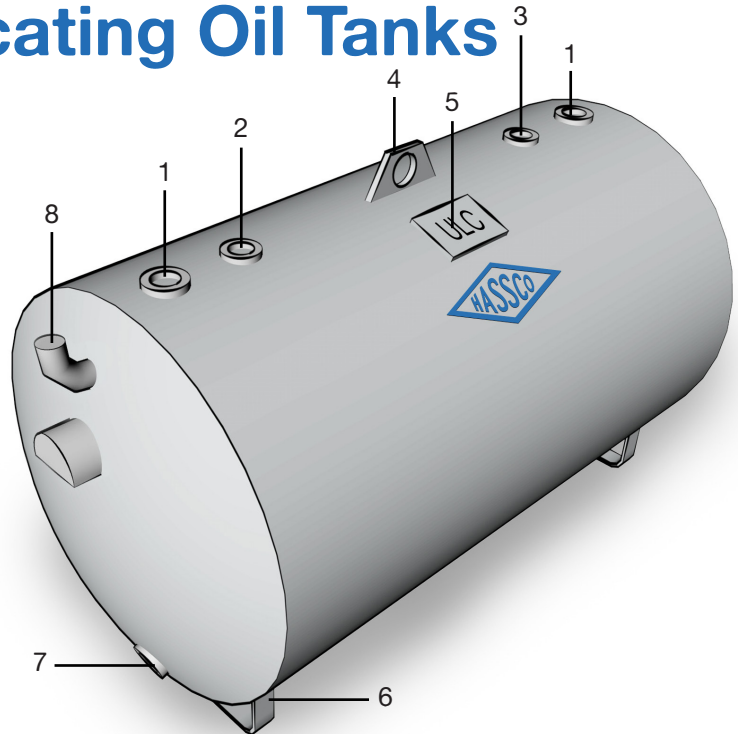

| Material (gauge) | Capacity | Diameter | Length | Weight |
|------------------|------------|----------|--------|----------|
| 12 | 450L/100G | 30" | 48" | 420lbs. |
| 12 | 1100L/250G | 38" | 60" | 680lbs. |
| 12 | 1360L/300G | 38" | 72" | 740lbs. |
| 12 | 2200L/500G | 50" | 72" | 1060lbs. |

General Information

HASSCO's line of Double-Wall tanks includes tanks which are specific for the storage of fuel oil & lubricating oils. This tank is available in Double-Wall vacuum monitored and integral contained tank designs as well as horizontal and vertical configurations. These tanks come with a minimum of 4 NPT fittings, HASSCO can customize the fittings on these tanks to best suit your installation requirements. All HASSCO tanks are phosphate washed prior to applying a high build metal treatment and two top coats of enviro-smart water based paint.

Options

- Single-Wall version available
- Tank gauges, alarms, heaters and pumping systems
- Powder Coating
- Interior linings
- Available in custom sizes and configurations

Sizing

- Up to 2200L/500G

Conformity

- ULC S602

