


Hassco

# Larger Aboveground Tanks Double Wall

1. Lockable Overfill Box c/w fill
2. 2" Threaded Fitting
3. Lift Lug
4. ULC Label
5. Emergency Vent
6. 4" Threaded Fitting
7. 3" Threaded Fitting
8. Full Length Frame (optional)
9. Stairs & Platform/Ladder
10. Post Beam Supports
11. Vacuum Gauge
12. Emergency Vent (interstice)

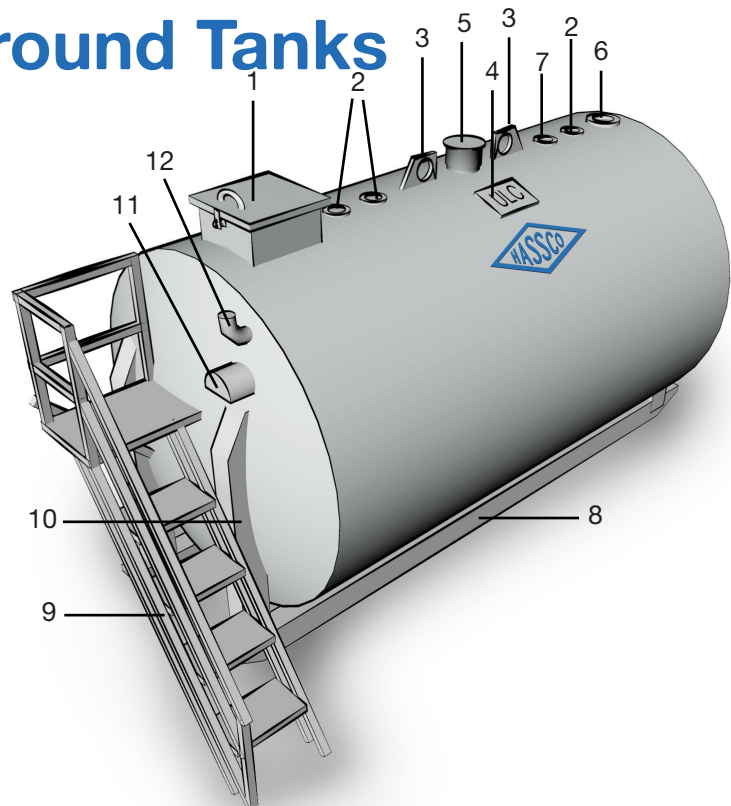

Material	Capacity		Diameter + Stairs	Length + Stairs	Weight
3/16"	10 000L/2200G	Ladder	79"	125" + 18"	4600lbs.
3/16"	15 000L/3300G	Ladder	79"	188" + 18"	6000lbs.
3/16"	18 000L/4000G	Stairs	84" + 36"	201" + 26"	8000lbs.
3/16"	25 000L/5500G	Stairs	99" + 36"	201" + 26"	9500lbs.
3/16"	35 000L/7700G	Stairs	99" + 36"	281" + 26"	11500lbs.
1/4"	50 000L/11 000G	Stairs	99" + 36"	404" + 26"	18000lbs.
1/4"	60 000L/13 000G	Stairs	118" + 36"	336" + 26"	21000lbs.

## General Information

HASSCO's aboveground storage tanks are manufactured with North American hot rolled steel & meets or exceeds ULC specifications. Our vacuum monitored tanks will provide safe fuel containment for years to come. Tanks include standard post beam supports with stairs & platform. Emergency venting, spillbox, fill cap & vacuum gauges are all standard. Available in single wall or double wall configurations. Double wall tanks successfully comply with secondary containment requirements therefore removing the need of dyking systems. All tanks are blast cleaned prior to applying 1 coat epoxy primer and 2 coats premium urethane finish.

## Options

- Tank gauges, alarms, liners, heaters, and pumping & card-lock systems
- Vehicle barrier systems and catwalks
- Customized to your specifications as needed
- Single wall version available

## Sizing

- Up to 60 000L/13 000G

## Conformity

- ULC S601

