


Hassco

Rectangular Utility Tanks

Double-Wall

1. 2" Threaded Fitting
2. Lift Lug
3. ULC Label
4. Vacuum Gauge
5. Legs
6. Emergency Vent

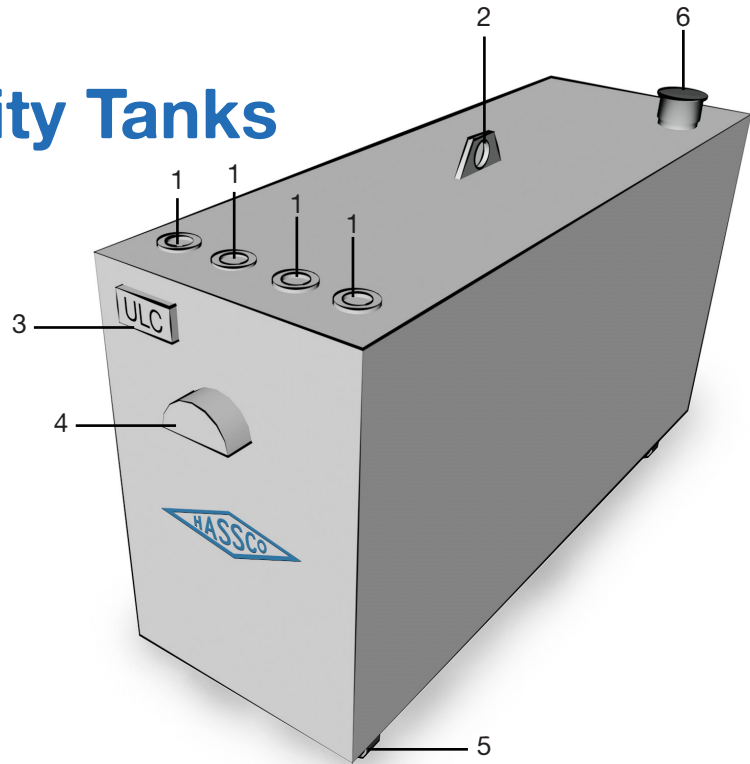

Material (gauge)	Capacity	Width	Length	Height	Weight
12	450L	24"	24"	48"	375lbs.
12	900L	24"	48"	48"	590lbs.
12	1100L	30"	48"	48"	650lbs.
12	1360L	36"	48"	48"	750lbs.
12	2200L	34"	72"	60"	1175lbs.
7	4500L	48"	84"	72"	2125lbs.

General Information

HASSCO's rectangular storage tank is built to the latest ULC specifications and will offer safe fuel storage with the most efficient use of floor space. These tanks are can be built to ULC S601 and ULC S602 standards. They are available in double-wall and single-wall versions. Tanks include standard fittings for fill, supply, vents and level monitoring as well as emergency vents. Bottom channel runners increase stability while raising the tank bottom off of the concrete floor. All HASSCO tanks are phosphate washed prior to applying a high build metal treatment and two top coats of enviro-smart water based paint.

Options

- Tank gauges, alarms, heaters and pumping systems
- Powder Coating
- Available in custom sizes
- Custom coatings and colour finishes

Sizing

- Up to 2,500L (ULC S602)
- Up to 15,000L (ULC S601)

Conformity

- ULC S601 & ULC S602

