


Hassco

# Single-Wall Utility Tanks Double Bottom

1. Lockable Overfill Box c/w fill
2. 2" Threaded Fitting
3. Lift Lug
4. ULC Label
5. Emergency Vent
6. Legs
7. 1" Drain (npt) Plugged
8. Leak Detection
9. Double Bottom Weld Seam

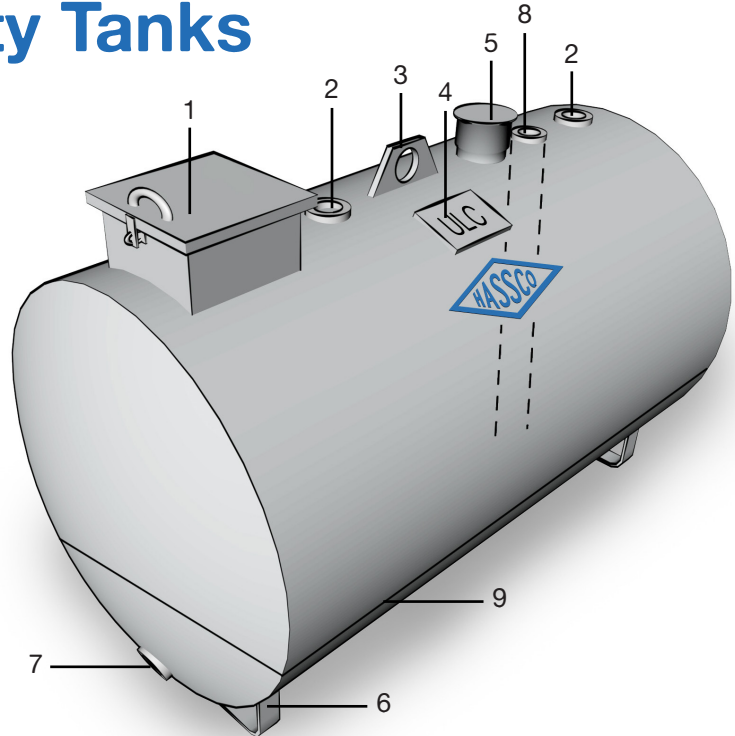

Material (gauge)	Capacity	Diameter	Length	Weight
12	450L/100G	30"	48"	230lbs.
12	1135L/250G	38"	60"	340lbs.
12	1360L/300G	38"	72"	395lbs.
12	2200L/500G	50"	72"	540lbs.
12	4500L/1000G	50"	144"	910lbs.

## General Information

HASSCO's Single-Wall, double bottom utility tank offers protection where it is most needed. This interstitial space can be easily monitored by a monitoring tube. With a visual signal installed, the tank can be taken out of service before any chance of a leak to the environment. All HASSCO tanks are phosphate washed prior to applying a high build metal treatment and two top coats of enviro-smart water based paint.

## Options

- Tank gauges, alarms, heaters and pumping systems
- Powder Coating
- Interior linings
- Available in custom sizes and configurations

## Sizing

- Up to 4500L/1000G

## Conformity

- ULC S601

